


UNLESS OTHERWISE SPECIFIED
TOLERANCES $\pm \frac{1}{8}$

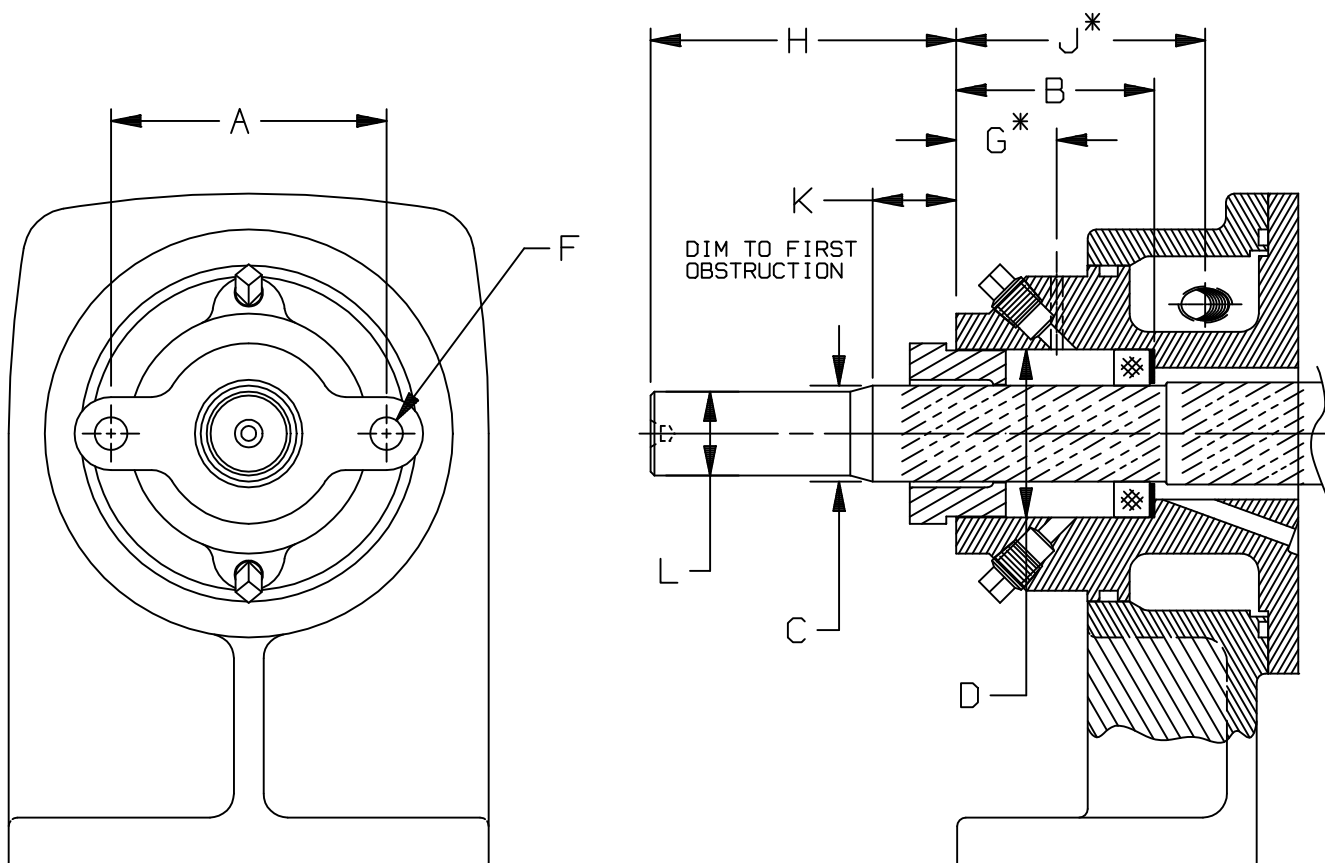

J* ~ IS A FLUSH HOLE DIMENSION
CPLG = COUPLING FACE IS FIRST OBSTRUCTION

PUMP MODEL	UNITS	A	B	C	D	E	F	G	H	J	K	L
SNP1.25	IN	2.875	2.062	.999	1.750	—	5/16-18	.97	3.19	1.12	.87	.875
	MM	73.0	52.4	25.3	44.4	—		24.6	81.0	28.4	22.1	22.2
SNP1.5	IN	2.875	2.062	.999	1.750	—	5/16-18	.97	3.19	1.12	.87	.875
	MM	73.0	52.4	25.3	44.4	—		24.6	81.0	28.4	22.1	22.2
SNP2	IN	2.875	3.093	.999	1.750	—	5/16-18	.97	5.03	2.09	CPLG	1.000
	MM	73.0	78.6	25.3	44.4	—		24.6	127.7	53.1	CPLG	25.4
SNP2.5	IN	3.250	3.000	1.372	2.126	—	3/8-16	1.12	4.50	2.00	.53	1.125
	MM	82.6	76.2	34.8	54.0	—		28.4	114.3	50.8	13.4	28.5
SNP3A	IN	3.250	2.000	1.372	2.125	—	3/8-16	1.12	7.76	N/A	2.060	1.250
	MM	82.6	50.8	34.8	53.9	—		28.4	197.1	N/A	52.3	31.7